

# इंटरनेट

# मानक

## Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 2720-27 (1977): Methods of test for soils, Part 27:  
Determination of total soluble sulphates [CED 43: Soil and  
Foundation Engineering]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

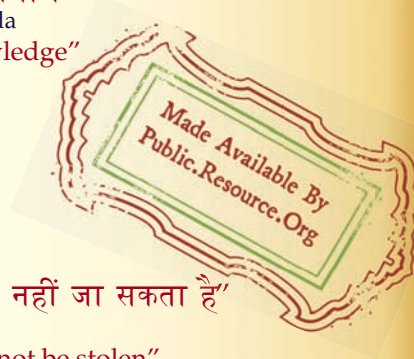

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”



BLANK PAGE



IS : 2720 ( Part XXVII ) - 1977  
( Reaffirmed 1995 )

*Indian Standard*  
METHODS OF TEST FOR SOILS  
PART XXVII DETERMINATION OF TOTAL  
SOLUBLE SULPHATES

( *First Revision* )

---

Third Reprint MARCH 1997

UDC 624.131.41 : 543.83 : 546.226

© Copyright 1978

**BUREAU OF INDIAN STANDARDS**  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

# *Indian Standard*

## METHODS OF TEST FOR SOILS

### PART XXVII DETERMINATION OF TOTAL SOLUBLE SULPHATES

### ( *First Revision* )

Soil Engineering Sectional Committee, BDC 23

*Chairman*

PROF DINESH MOHAN

*Representing*

Central Building Research Institute ( CSIR ),  
Roorkee

*Members*

ADDITIONAL CHIEF ENGINEER

Public Works Department, Government of Uttar  
Pradesh

SHRI D. C. CHATURVEDI ( *Alternate* )

ADDITIONAL DIRECTOR RESEARCH ( RDSO )  
Railway Board ( Ministry of Railways )

DEPUTY DIRECTOR RESEARCH  
( RDSO ) ( *Alternate* )

PROF ALAM SINGH

University of Jodhpur, Jodhpur

LT-COL AVTAR SINGH

Engineer-in-Chief's Branch, Army Headquarters

MAJ V. K. KANITKAR ( *Alternate* )

DR A. BANERJEE

Cementation Co Ltd, Calcutta

SHRI S. GUPTA ( *Alternate* )

CHIEF ENGINEER ( D & R )

Irrigation Department, Government of Punjab

DIRECTOR ( IPRI ) ( *Alternate* )

SHRI K. N. DADINA

In personal capacity ( P-820, ' P ' New Alipore,  
Calcutta 700053 )

SHRI A. G. DASTIDAR

In personal capacity ( 5 Hungerford Street, 12/1  
Hungerford Court, Calcutta 700017 )

SHRI R. L. DEWAN

Irrigation Research Institute, Khagaul, Patna

DR G. S. DHILLON

Indian Geotechnical Society, New Delhi

SHRI A. H. DIVANJI

Asia Foundations & Construction ( P ) Ltd, Bombay

SHRI A. N. JANGLE ( *Alternate* )

DR SHASHI K. GULHATI

Indian Institute of Technology, New Delhi

DR G. V. RAO ( *Alternate* )

SHRI V. G. HEGDE

National Buildings Organization, New Delhi

SHRI S. H. BALCHANDANI ( *Alternate* )

SHRI O. P. MALHOTRA

Public Works Department, Government of Punjab

SHRI J. S. MARYA

Roads Wing ( Ministry of Shipping & Transport ),  
New Delhi

SHRI N. SEN ( *Alternate* )

( *Continued on page 2* )

© Copyright 1978

BUREAU OF INDIAN STANDARDS

This publication is protected under the *Indian Copyright Act* ( XIV of 1957 ) and reproduction in whole or in part by any means except with written permission of the publisher shall be deemed to be an infringement of copyright under the said Act.

## IS : 2720 ( Part XXVII ) - 1977

( Continued from page 1 )

<i>Members</i>	<i>Representing</i>
SHRI R. S. MELKOTE DEPUTY DIRECTOR ( CSMRS ) ( Alternate )	Central Water Commission, New Delhi
SHRI T. K. NATARAJAN	Central Road Research Institute ( CSIR ), New Delhi
REPRESENTATIVE RESEARCH OFFICER	Hindustan Construction Co Ltd, Bombay Building & Roads Research Laboratory, Chandigarh
SHRI K. R. SAXENA SECRETARY	Engineering Research Laboratories, Hyderabad Central Board of Irrigation & Power, New Delhi
DEPUTY SECRETARY ( Alternate )	
*DR SHAMSHER PRAKASH DR GOPAL RANJAN ( Alternate )	University of Roorkee, Roorkee
SHRI H. D. SHARMA SUPERINTENDING ENGINEER	Irrigation Research Institute, Roorkee Public Works Department, Government of Tamil Nadu
EXECUTIVE ENGINEER ( Alternate )	
SHRI B. T. UNWALLA	Concrete Association of India, Bombay
SHRI T. M. MENON ( Alternate )	
SHRI H. C. VERMA	All India Instruments Manufacturers & Dealers Association, Bombay
SHRI V. K. VASUDEVAN ( Alternate )	
SHRI D. AJITHA SIMHA, Director ( Civ Engg )	Director General, BIS ( Ex-officio Member )

### *Secretary*

SHRI G. RAMAN  
Deputy Director ( Civ Engg ), ISI

## Soil Testing Procedures and Equipment Subcommittee, BDC 23 : 3

### *Convener*

PROF ALAM SINGH                      University of Jodhpur, Jodhpur

### *Members*

SHRI AMAR SINGH	Central Building Research Institute ( CSIR ), Roorkee
LT-COL AVTAR SINGH	Engineer-in-Chief's Branch, Army Headquarters
MAJ V. K. KANITKAR ( Alternate )	
SHRI R. L. DEWAN	Irrigation Research Institute, Khagaul, Patna
DEPUTY DIRECTOR RESEARCH ( SOIL MECHANICS-I ) ( RDSO )	Railway Board ( Ministry of Railways )
ASSISTANT DIRECTOR RESEARCH ( SOIL MECHANICS-I ) ( RDSO ) ( Alternate )	
DIRECTOR ( I & C )	Beas Dams Projects, Talwara Township
SHRI K. S. PREM ( Alternate )	
SHRI H. K. GUHA	Geologist Syndicate Pvt Ltd, Calcutta
SHRI N. N. BHATTACHARAYA ( Alternate )	
SHRI SHASHI K. GULHATI	Indian Institute of Technology, New Delhi
SHRI R. K. JAIN	United Technical Consultants ( P ) Ltd, New Delhi
DR P. K. DE ( Alternate )	

( Continued on page 9 )

\*Also represents Institution of Engineers ( India ), Delhi Centre.

*Indian Standard*

METHODS OF TEST FOR SOILS

PART XXVII DETERMINATION OF TOTAL  
SOLUBLE SULPHATES

*( First Revision )*

**0. FOREWORD**

**0.1** This Indian Standard ( Part XXVII ) ( First Revision ) was adopted by the Indian Standards Institution on 30 December 1977, after the draft finalized by the Soil Engineering Sectional Committee had been approved by the Civil Engineering Division Council.

**0.2** With a view to establish uniform procedures for the determination of different characteristics of soils and also for facilitating comparative studies of the results, the Indian Standards Institution is bringing out this Indian Standard Methods of test for soils ( IS : 2720 ) which is being published in parts. This part [ IS : 2720 ( Part XXVII ) - 1977 ] deals with the method for the determination of total soluble sulphates in soils. Sodium sulphate is present in some Indian soils. The salt is easily hydrated and dehydrated under the influence of climatic changes. There are enormous volume changes during this process of hydration and dehydration, which influence the engineering properties of soils. Both soluble sulphate content and moisture content of soil are subject to seasonal fluctuations and are mutually interdependent.

**0.2.1** This standard was first published in 1968. In this revision a colorimetric or turbidimetric method, which is a rapid method has been added.

**0.3** In the formulation of this standard due weightage has been given to international co-ordination among the standards and practices prevailing in different countries in addition to relating it to the practices in the field in this country. This has been met by basing the standard on the following publication:

INDIA. MINISTRY OF IRRIGATION & POWER. Central Board of Irrigation & Power, Publication No. 42. Standards for testing soils. 1963. Central Board of Irrigation & Power, New Delhi.

## IS : 2720 ( Part XXVII ) - 1977

0.4 In reporting the result of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS : 2-1960\*.

---

### 1. SCOPE

1.1 This standard ( Part XXVII ) lays down the procedure for determining the total soluble sulphate content of soils by: (a) precipitation method, (b) volumetric method, and (c) colorimetric or turbidimetric method.

### 2. PRECIPITATION METHOD ( STANDARD METHOD )

#### 2.1 Apparatus

2.1.1 *Analytical Balance* — sensitive to 0.001 g.

2.1.2 *Glass Beaker* — of 250 ml capacity.

2.1.3 *Glass Funnel* — 50 mm diameter.

2.1.4 *Glass Bottle* — of 250 ml capacity with a rubber cork.

2.1.5 *Crucible* — of 50 ml capacity.

2.1.6 *Heating Equipment*

2.1.7 *Pipette* — 25 ml.

2.1.8 *Burette* — 50 ml with 0.1 ml graduation.

2.1.9 *A Mortar with Rubber Covered Pestle*

2.1.10 *Filter Paper* — Whatman No. 42 or equivalent.

2.1.11 *Muffle Furnace*

2.1.12 *Mechanical Shaker*

2.1.13 *Drying Oven*

#### 2.2 Reagents

2.2.1 *Phenolphthalein Indicator Solution* — Dissolve 0.1 g of phenolphthalein in 60 ml of rectified spirit and dilute with distilled water to 100 ml.

2.2.2 *Concentrated Hydrochloric Acid* — specific gravity 1.18 (conforming to IS : 265-1962†).

2.2.3 *Barium Chloride Solution* — 5 percent. Dissolve 5 g of barium chloride in 100 ml of distilled water.

---

\*Rules for rounding off numerical values ( revised ).

†Specification for hydrochloric acid ( revised ).

**2.2.4 Silver Nitrate Indicator Solution** — 0.5 percent. Dissolve 500 mg of silver nitrate in 100 ml of distilled water.

NOTE — Unless specified otherwise, pure chemicals and distilled water ( *see* IS : 1070-1977\* ) shall be used in tests. 'Pure chemicals' shall mean chemicals that do not contain impurities which affect the results of analysis.

**2.3 Soil Sample** — The soil sample shall be brought to a state in which it may be crumbled, if necessary, by drying it in an oven maintained at 105 to 110°C. The aggregations of particles shall be broken up in mortar with rubber covered pestle or the mechanical device. The sample shall be thoroughly mixed and then sub-divided by quartering.

**2.4 Principle of the Method** — The method depends upon preparing an aqueous extract of the soil and determining the sulphate content of this extract or an aliquot portion of it by the precipitation of sulphate as barium sulphate, filtering off the precipitate and weighing it.

**2.5 Procedure** — Take 10 g of soil from the sample prepared as given in 2.3, in a 250-ml bottle with 100 ml of distilled water. Give occasional shaking for 2 h by means of the mechanical shaker. Allow the soil suspension to stand overnight ( in case the soil is in a dispersed condition, add 0.5 to 1.0 g of pure potassium nitrate to flocculate the particles ). Filter and take 25 ml of filtrate in a beaker and add concentrated hydrochloric acid to just neutralize the solution if it is found alkaline to phenolphthalein indicator. Add further 4 ml concentrated hydrochloric acid to make the solution acidic. Boil the solution. Remove the solution from the source of heat and add hot barium chloride solution in a fine stream with constant stirring, till there is no precipitation with a further addition. Place the beaker on a steam-bath for a minimum period of 4 h and allow the precipitate to settle. Filter the precipitate through ashless filter paper, wash free from chloride ions ( *see* Note ), dry and ignite. The filtration may also be done through a preweighed sintered glass crucible or a Gooch crucible. In the case of filter paper, after drying, ashing shall be done on a low flame and the precipitate then ignited over a burner or in a muffle furnace at 600 to 700°C for half an hour. Cool in a desiccator, weigh and note the weight of the residue. This is the weight of barium sulphate. A corresponding weight of sodium sulphate should be calculated and thus its percentage determined ( *see* 2.6 ).

NOTE — To check whether the residue is free of chloride ions, collect the washings in a separate test-tube at different time intervals and add a drop of 0.5 percent silver nitrate solution to it. The formation of white cloudy precipitate shows the presence of chloride ions in the precipitate. Continue washing until the white precipitate is not formed in the washings by the addition of silver nitrate solution. Hot water may be used for washing.

\*Specification for water for general laboratory use ( *second revision* ).

## 2.6 Calculations

2.6.1 Calculate as follows:

a) Sulphates ( as  $\text{SO}_4$  ), percent by mass =  $41.15 \frac{W_1}{W_2}$

b) Sulphates ( as  $\text{Na}_2 \text{SO}_4$  ), percent by mass =  $60.85 \frac{W_1}{W_2}$

where

$W_1$  = mass in g of the precipitate, and

$W_2$  = mass in g of the soil contained in the solution taken for precipitation.

## 3. VOLUMETRIC METHOD ( SUBSIDIARY METHOD )

**3.1 Principle** — The volumetric method depends upon insoluble barium sulphate forming and settling rapidly when barium chloride solution is added to the sulphate solution. The barium chloride reagent is added in excess and the excess is determined by the standard solution of barium chromate. With the formation of potassium chromate, the slight excess of chromate reagent becomes evident from the resultant yellow colour of the supernatant solution. The end point can be further tested ( confirmed ) by silver nitrate solution used as an external indicator. A brick red colouration is obtained when a drop of silver nitrate is added to a drop of the chromate solution.

## 3.2 Apparatus

3.2.1 *Analytical Balance* — sensitive to 0.001 g.

3.2.2 *Glass Beakers* — two, of 150 ml capacity.

3.2.3 *Glass Funnel* — 6 cm diameter.

3.2.4 *Measuring Flasks* — one of 100 ml and two of 500 ml capacity.

3.2.5 *Burette* — two, of 25 ml, 1/20 ml graduation.

3.2.6 *Conical Flasks* — six, of 150 ml capacity.

3.2.7 *Pipette* — 10 ml.

3.2.8 *Filter Papers*

3.2.9 *Heating Equipment*

3.2.10 *Drying Oven*

## 3.3 Reagents

3.3.1 *Barium Chloride Solution* — N/4. Dissolve 30.54 g of barium chloride in one litre of distilled water.

**3.3.2 Potassium Chromate Solution** — N/4. Dissolve 24.275 g of potassium chromate in a small amount of distilled water. Add a few drops of silver nitrate solution to it to remove any chloride, filter and dilute to 250 ml.

**3.3.3 Silver Nitrate Indicator Solution** — 0.5 percent. Dissolve 500 mg of silver nitrate in 100 ml of distilled water.

**3.3.4 Dilute Solution of Ammonium Hydroxide** — (sp gr 0.888). Mix ammonium hydroxide and distilled water in the ratio of 1 : 2 (one part of ammonia and two parts of distilled water).

**3.3.5 Concentrated Hydrochloric Acid** — sp gr 1.11 (conforming to IS : 265-1962\* ).

NOTE — Unless specified otherwise, pure chemicals and distilled water (see IS : 1070-1977†) shall be used in tests. 'Pure chemicals' shall mean chemicals that do not contain impurities which affect the results of analysis.

**3.4 Procedure** — Weigh 10 g of the soil specimen obtained by the method specified in 2.3, in a beaker and add about 50 ml water. Stir well, allow to decant, filter, wash the soil on filter paper with a small quantity of water and make the filtrate to 100 ml. Pipette out 10 ml of the water extract in a conical flask, make it slightly acidic by adding concentrated hydrochloric acid and heat to boiling. While boiling, add barium chloride solution (N/4) from the burette till the precipitation is complete and barium chloride solution is in slight excess.

**3.4.1** Neutralize the solution with ammonium hydroxide and titrate the excess of barium chloride against potassium chromate solution (N/4). The end point may be confirmed if considered necessary, by using silver nitrate solution as an external indicator (see 3.1).

**3.5 Calculation** — Calculate as follows:

Sulphates as sodium sulphate in soil,  
percent by mass =  $0.0177 \times 100 (x - y)$

where

$x$  = volume of N/4 barium chloride added, ml;

$y$  = volume of N/4 potassium chromate solution used in back titration; and

$x - y$  = N/4 barium chloride actually used for precipitating sulphate.

\*Specification for hydrochloric acid (revised).

†Specification for water for general laboratory use (second revision).

## 4. COLORIMETRIC OR TURBIDIMETRIC METHOD ( SUBSIDIARY METHOD )

### 4.1 Apparatus

4.1.1 *Conical Flask* — 250 ml.

4.1.2 *Volumetric Flask* — 25 ml.

4.1.3 *Analytical Balance* — sensitivity 0.001 g.

4.1.4 *Photoelectric Colorimeter or Turbidimeter*

4.1.5 *Filter Paper* — Whatman No. 42 or equivalent.

### 4.2 Reagents

4.2.1 *Morgan's Extraction Solution* — 100 g of sodium acetate and 30 ml of 99.5 percent acetic acid dissolved and mixed in 500 ml of water and the volume made to 1 litre.

4.2.2 *Barium Chloride Crystals*

4.2.3 *25 Percent Gum Acatia*

4.3 **Procedure** — Weigh 20 g air-dry soil specimen in a 250-ml conical flask. Add 100 ml of Morgan's extraction solution. Shake the suspension for one-half hour and filter through Whatman's No. 42 filter paper or equivalent. Take 10 or 20 ml aliquot and transfer to a 25-ml volumetric flask. Add 1 g of barium chloride crystals ( ground to pass 500-micron IS sieve and to be retained on 250-micron IS sieve ) to the aliquot in the flask and shake for 1 minute. Add 1 or 2 ml of 25 percent gum acatia. Pour distilled water up to the mark of volumetric flask and shake for a minute. Precipitate the suspension and take the reading between 5 to 30 minutes after precipitation either by photoelectric colorimeter using blue filter or by turbidimeter. Sulphate is then determined by the standard sulphate curve.

### 4.4 Preparation of Standard Sulphate Curve

4.4.1 *Stock Solution* — Dissolve 0.888 g anhydrous sodium sulphate  $\text{Na}_2\text{SO}_4$ /l alcoholic (N) ammonium chloride ( $\text{NH}_4\text{Cl}$ ). This gives a concentration of 0.60 mg of  $\text{SO}_4$ /ml.

NOTE — Absolute alcohol should be used for the preparation of the solution.

4.4.2 *Working Standard Solution* — Dilute 0.60 mg  $\text{SO}_4$ /ml stock solution with alcoholic (N) ammonium chloride to give 0.06 mg  $\text{SO}_4$ /ml. Take 2, 4, 6, 8, 10 ml of this to give a range of 0.12 — 0.60 mg of  $\text{SO}_4$ .

4.4.3 The standard curve should be prepared by taking readings with photoelectric colorimeter using blue filter or by turbidimeter using the working standard solution.

( Continued from page 2 )

<i>Members</i>	<i>Representing</i>
SHRI O. P. MALHOTRA RESEARCH OFFICER ( BLDG & ROADS ) ( <i>Alternate</i> )	Building & Roads Research Laboratory, Chandigarh
SHRI R. S. MELKOTE DEPUTY DIRECTOR ( CSMRS ) ( <i>Alternate</i> )	Central Water Commission, New Delhi
SHRI P. JAGANNATHA RAO	Central Road Research Institute ( CSIR ), New Delhi
SHRI N. SEN	Ministry of Shipping & Transport ( Roads Wing ), New Delhi
SHRI P. K. THOMAS ( <i>Alternate</i> )	
SHRI M. M. D. SETH	Public Works Department, Government of Uttar Pradesh
DR B. L. DHAWAN ( <i>Alternate</i> )	
SHRI V. V. S. RAO	In personal capacity ( F-24, Green Park, New Delhi )
SHRI H. C. VERMA	Associated Instruments Manufacturers ( I ) Pvt Ltd, New Delhi

## BUREAU OF INDIAN STANDARDS

### Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones: 323 0131, 323 3375, 323 9402

Fax : 91 11 3234062, 91 11 3239399, 91 11 3239382

Telegrams : Manaksanstha  
(Common to all Offices)

### Central Laboratory:

Plot No. 20/9, Site IV, Sahibabad Industrial Area, SAHIBABAD 201010

Telephone

8-77 00 32

### Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002 323 76 17

\*Eastern : 1/14 CIT Scheme VII M, V.I.P. Road, Maniktola, CALCUTTA 700054 337 86 62

Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160022 60 38 43

Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113 235 23 15

†Western : Manakalaya, E9 Behind Marol Telephone Exchange, Andheri (East),  
MUMBAI 400093 832 92 95

### Branch Offices:

'Pushpak', Nurmohamed Shaikh Marg, Khanpur, AHMEDABAD 380001 550 13 48

‡Peenya Industrial Area, 1st Stage, Bangalore - Tumkur Road,  
BANGALORE 560058 839 49 55

Gangotri Complex, 5th Floor, Bhadbhada Road, T. T. Nagar, BHOPAL 462003 55 40 21

Plot No. 62-63, Unit VI, Ganga Nagar, BHUBANESHWAR 751001 40 36 27

Kalaikathir Buildings, 670 Avinashi Road, COIMBATORE 641037 21 01 41

Plot No. 43, Sector 16 A, Mathura Road, FARIDABAD 121001 8-28 88 01

Savitri Complex, 116 G. T. Road, GHAZIABAD 201001 8-71 19 96

53/5 Ward No. 29, R. G. Barua Road, 5th By-lane, GUWAHATI 781003 54 11 37

5-8-58C, L. N. Gupta Marg, Nampally Station Road, HYDERABAD 500001 20 10 83

E-52, Chitaranjan Marg, C-Scheme, JAIPUR 302001 37 29 25

117/418 B, Sarvodaya Nagar, KANPUR 208005 21 68 76

Seth Bhawan, 2nd Floor, Behind Leela Cinema, Naval Kishore Road,  
LUCKNOW 226001 23 89 23

Patliputra Industrial Estate, PATNA 800013 26 23 05

T. C. No. 14/1421, University P. O. Palayam,  
THIRUVANANTHAPURAM 695034 6 21 17

NIT Building, Second Floor, Gokulpat Market, NAGPUR 440010 52 51 71

Institution of Engineers ( India ) Building, 1332 Shivaji Nagar, PUNE 411005 32 36 35

\*Sales Office is at 5 Chowringhee Approach, P. O. Princep Street,  
CALCUTTA 700072 27 10 85

†Sales Office is at Novelty Chambers, Grant Road, MUMBAI 400007 309 65 28

‡Sales Office is at 'F' Block, Unity Building, Narashimaraja Square,  
BANGALORE 560002 222 39 71