

# इंटरनेट

# मानक

## Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 2720-6 (1972): Methods of test for soils, Part 6: Determination of shrinkage factors [CED 43: Soil and Foundation Engineering]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”



BLANK PAGE



IS : 2720 ( Part VI ) - 1972

*Indian Standard*

METHODS OF TEST FOR SOILS

PART VI DETERMINATION OF SHRINKAGE FACTORS

( *First Revision* )

---

Fifth Reprint AUGUST 1993

UDC 624.131.434

© Copyright 1972

BUREAU OF INDIAN STANDARDS  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

# *Indian Standard*

## METHODS OF TEST FOR SOILS

### PART VI DETERMINATION OF SHRINKAGE FACTORS

### *( First Revision )*

---

Soil Engineering Sectional Committee, BDC 23

*Chairman*

PROF DINESH MOHAN

*Representing*

Central Building Research Institute ( CSIR ),  
Roorkee

*Members*

SHRI D. R. NARAHARI ( *Alternate to*  
Prof Dinesh Mohan )

PROF ALAM SINGH

University of Jodhpur, Jodhpur  
Cementation Co Ltd, Bombay

DR A. BANERJEE

SHRI S. GUPTA ( *Alternate* )

SHRI B. B. L. BHATNAGAR

Land Reclamation, Irrigation & Power Research  
Institute, Amritsar

SHRI K. N. DADINA

In personal capacity (P-820, New Alipore, Calcutta 53)

SHRI A. G. DASTIDAR

Hindustan Construction Co Ltd, Bombay

SHRI R. L. DEWAN

Bihar Institute of Hydraulic & Allied Research,  
Khagaul, Patna

DR G. S. DHILLON

Indian Geotechnical Society, New Delhi

PROF R. N. DOGRA

Indian Institute of Technology, New Delhi

SHRI S. K. GULHATI ( *Alternate* )

JOINT DIRECTOR RESEARCH ( FE ), Railway Board ( Ministry of Railways )

RDSO

DEPUTY DIRECTOR RESEARCH

( SOIL MECHANICS ), RDSO

( *Alternate* )

SHRI S. S. JOSHI

Engineer-in-Chief's Branch, Army Headquarters

SHRI S. VARADARAJA ( *Alternate* )

SHRI I. P. KAPILA

Central Board of Irrigation & Power, New Delhi

SHRI G. KUECKELMANN

Rodio Foundation Engineering Ltd; and Hazarat &  
Co, Bombay

SHRI A. H. DIVANJI ( *Alternate* )

SHRI O. P. MALHOTRA

Public Works Department, Government of Punjab

SHRI M. A. MEHTA

Concrete Association of India, Bombay

SHRI T. M. MENON ( *Alternate* )

( *Continued on page 2* )

---

BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG

NEW DELHI 110002

# IS : 2720 (Part VI) - 1972

(Continued from page 1)

<i>Members</i>	<i>Representing</i>
SHRI R. S. MELKOTE DEPUTY DIRECTOR ( CENTRAL SOIL MECHANICS RESEARCH STATION ) ( Alternate )	Central Water & Power Commission, New Delhi
SHRI T. K. NATARAJAN	Central Road Research Institute ( CSIR ), New Delhi
SHRI RAVINDER LAL SHRI S. H. BALACHANDANI ( Alternate )	National Buildings Organization, New Delhi
RESEARCH OFFICER	Buildings & Roads Research Laboratory, Public Works Department, Government of Punjab
RESEARCH OFFICER	Engineering Research Laboratory, Hyderabad
DR SHAMSHER PRAKASH	University of Roorkee, Roorkee
SHRI H. D. SHARMA	Irrigation Research Institute, Roorkee
SHRI S. N. SINHA	Roads Wing ( Ministry of Shipping & Transport )
SHRI A. S. BISHNOI ( Alternate )	
SUPERINTENDING ENGINEER ( PLANNING AND DESIGN CIRCLE )	Concrete & Soil Research Laboratory, Public Works Department, Government of Tamil Nadu
EXECUTIVE ENGINEER ( IN CHARGE , SOIL MECHANICS & RESEARCH DIVISION ) ( Alternate )	
SHRI C. G. SWAMINATHAN	Institution of Engineers ( India ), Calcutta
SHRI H. C. VERMA	All India Instruments Manufacturers & Dealers Association, Bombay
SHRI S. R. TALPADE ( Alternate )	
SHRI H. C. VERMA	Public Works Department, Government of Uttar Pradesh
SHRI D. C. CHATURVEDI ( Alternate )	
SHRI D. AJITHA SIMHA, Director ( Civ Engg )	Director General, ISI ( Ex-officio Member )

## *Secretary*

SHRI G. RAMAN  
Deputy Director ( Civ Engg ) , ISI

## Soil Testing Procedures and Equipment Subcommittee, BDC 23:3

### *Convener*

PROF ALAM SINGH                      University of Jodhpur, Jodhpur

### *Members*

DR R. K. BHANDARI	Central Road Research Institute ( CSIR ), New Delhi
SHRI T. N. BHARGAVA	Roads Wing ( Ministry of Shipping & Transport )
SHRI A. S. BISHNOI ( Alternate )	
SHRI R. L. DEWAN	Bihar Institute of Hydraulic & Allied Research, Khagaul, Patna
SHRI H. K. GUHA	Geologists Syndicate Private Ltd, Calcutta
SHRI N. N. BHATTACHARYYA ( Alternate )	

( Continued on page 12 )

# *Indian Standard*

## METHODS OF TEST FOR SOILS

### PART VI DETERMINATION OF SHRINKAGE FACTORS

#### *( First Revision )*

#### 0. FOREWORD

**0.1** This Indian Standard ( Part VI ) ( First Revision ) was adopted by the Indian Standards Institution on 25 February 1972, after the draft finalized by the Soil Engineering Sectional Committee had been approved by the Civil Engineering Division Council.

**0.2** With a view to establish uniform procedures for the determination of different characteristics of soils and also for facilitating a comparative study of the results, the Indian Standards Institution is bringing out this ' Indian Standard methods of test for soils ' ( IS : 2720 ) which is being published in parts. Thirty-three parts of this series have been published so far.

**0.3** This part, first published in 1964, deals with the methods of test for the determination of shrinkage factors for soils. Factors, such as the shrinkage limit, shrinkage ratio, shrinkage index and volumetric shrinkage may be determined from the results of the test described. The method for determining the value of linear shrinkage on the basis of results of test conducted for obtaining the shrinkage limit has been found unsatisfactory and a direct method for determining this property has been covered in IS : 2720 ( Part XX )-1966\*. Hence reference to linear shrinkage has been deleted from this revision. As weight measurements can be made more accurately than volume measurements, the former method has been specified in this revision for the determination of the volume of the soil pat. The inside edge of the shrinkage dish has been rounded so that air entrapped during the measurement of the volume of the pat is minimized. Recently it has been recognized that shrinkage upon drying is also indicative of the structure of the soil. The greater the shrinkage the more dispersed the structure. It is possible, therefore, to study the shrinkage behaviour of undisturbed soil of natural or man-made deposits and get an idea of its structure. In this revision the term shrinkage limit ( undisturbed soil ) has been introduced to define this property and a method included for its determination. Consequently, the term originally known as shrinkage limit has been re-designated as shrinkage limit ( remoulded soil ).

---

\*Methods of test for soils: Part XX Determination of linear shrinkage.

## IS: 2720 (Part VI) - 1972

**0.4** In the formulation of this standard due weightage has been given to international co-ordination among the standards and practices prevailing in different countries in addition to relating it to the practices in the field in this country.

**0.5** In reporting the result of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS : 2-1960\*.

### 1. SCOPE

**1.1** This standard (Part VI) lays down the method of test for obtaining data from which the shrinkage factors, namely shrinkage limit (remoulded soil), shrinkage limit (undisturbed soil), shrinkage ratio, shrinkage index and volumetric shrinkage of soils may be calculated.

### 2. TERMINOLOGY

**2.1** For the purpose of this standard, the following definitions shall apply. For definitions of terms not given below, reference may be made to IS : 2809-1972†.

**2.1.1 Shrinkage Index ( $I_s$ )** — The numerical difference between the plastic limit and shrinkage limit (remoulded soil).

**2.1.2 Shrinkage Limit (Undisturbed Soil) ( $w_{su}$ )** — The maximum water content expressed as percentage of oven-dry weight at which any further reduction in water content will not cause a decrease in volume of the soil mass, the soil mass being initially of soil in its undisturbed state.

**2.1.3 Shrinkage Limit (Remoulded Soil) ( $w_s$ )** — The maximum water content expressed as percentage of oven-dry weight at which any further reduction in water content will not cause a decrease in volume of the soil mass, the soil mass being prepared initially from remoulded soil.

**2.1.4 Shrinkage Ratio ( $R$ )** — The ratio of a given volume change, expressed as a percentage of the dry volume, to the corresponding change in water content above the appropriate shrinkage limit, expressed as a percentage of the weight of the oven-dried soil.

**2.1.5 Volumetric Shrinkage (Volumetric Change) ( $V_s$ )** — The decrease in volume, expressed as a percentage of the soil mass when dried, of a soil mass when the water content is reduced from a given percentage to the appropriate shrinkage limit.

\*Rules for rounding off numerical values (*revised*).

†Glossary of terms and symbols relating to soil engineering (*first revision*).



### 3. APPARATUS

**3.1 Evaporating Dish** — two, porcelain, about 12 cm in diameter with a pour out and flat bottom, the diameter of flat bottom, being not less than 55 mm or an enamel iron tray with pour out.


**3.2 Spatula** — flexible, with the blade about 8 cm long and 2 cm wide.

**3.3 Shrinkage Dish** — circular, porcelain or non-corroding metal dish inert to mercury having a flat bottom and 45 mm in diameter and 15 mm height internally. The internal corner between the bottom and the vertical sides shall be rounded into a smooth concave curve.

**3.4 Straight Edge** — steel, about 15 cm in length.

**3.5 Glass Cup** — 50 to 55 mm in diameter and 25 mm in height, the top rim of which is ground smooth and level.

**3.6 Glass Plates** — two, each  $75 \times 75$  mm, 3 mm thick. One plate shall be of plain glass and the other shall have three metal prongs inert to mercury (see Fig. 1).

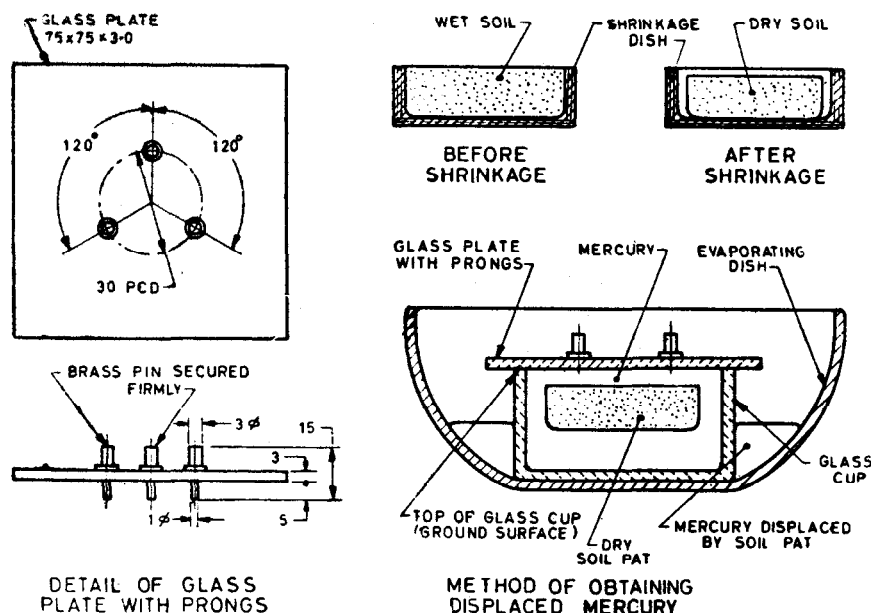

All dimensions in millimetres.

FIG. 1 APPARATUS FOR DETERMINING VOLUMETRIC CHANGE

## **IS : 2720 ( Part VI ) - 1972**

**3.7 Oven** — thermostatically controlled to maintain the temperature between 105 and 110°C, with interior of non-corroding material.

**3.8 Sieve** — 425-micron IS Sieves.

**3.9 Balances** — sensitive to 0.1 g and 0.01 g ( *see* IS : 1433-1965\* ).

**3.10 Mercury** — clean, sufficient to fill the glass cup to overflowing.

**3.11 Desiccator** — with any desiccating agent other than sulphuric acid.

### **4. SOIL SAMPLE FOR TEST**

**4.1 For Shrinkage Limit ( Remoulded Soil ) Test ( and Determination of Other Allied Properties )** — Take a sample weighing about 100 g from the thoroughly mixed portion of the material passing the 425-micron IS Sieve which has been obtained in accordance with IS : 2720 ( Part I )-1972†.

#### **4.2 Shrinkage Index ( Undisturbed Soil ) Test**

**4.2.1** Preserve the undisturbed soil sample received from the field in its undisturbed state.

**4.2.2** Trim from the undisturbed soil sample soil pats approximately 45 mm in diameter and 15 mm in height. Round off their edges to prevent the entrapment of air during mercury displacement.

### **5. PROCEDURE FOR DETERMINATION OF SHRINKAGE LIMIT ( REMOULDED SOIL ) AND OTHER ALLIED PROPERTIES**

**5.1 Preparation of Soil Paste** — Place about 30 g of the soil sample obtained in 4.1 in the evaporating dish and thoroughly mix with distilled water in an amount sufficient to fill the soil voids completely and to make the soil pasty enough to be readily worked into the shrinkage dish without entrapping air bubbles. In the case of friable soils the amount of water required to obtain the desired consistency is equal to or slightly greater than the liquid limit; in the case of plastic soils it may exceed the liquid limit by as much as 10 percent.

**5.2 Weight and Volume of the Shrinkage Dish** — Determine the weight of the clean empty shrinkage dish and record. Determine the capacity of the shrinkage dish in cubic centimetres, which is also the volume of the wet soil pat, by filling the shrinkage dish to overflowing with mercury, removing the excess by pressing the plain glass plate firmly over the top of the shrinkage dish in such a way that the plate is flush with the top of the dish and no air is entrapped, weighing the mercury held in the shrinkage dish to an accuracy of 0.1 g and dividing this weight by the unit weight of mercury to obtain the volume. Record this volume as the volume of the wet soil pat,  $V$ .

---

\*Specification for beam scales (*revised*).

†Methods of test for soils: Part I Preparation of dry soil samples for various tests (*first revision*).

**5.3 Filling the Shrinkage Dish** — Coat the inside of the shrinkage dish with a thin layer of silicone grease or vaseline or some other heavy grease to prevent the adhesion of soil to the dish. Place in the centre of the shrinkage dish an amount of the soil paste equal to about one-third the volume of the shrinkage dish, and allow the paste to flow to the edges by tapping the shrinkage dish on a firm surface cushioned by several layers of blotting paper, rubber sheet or similar material. Add an amount of the soil paste approximately equal to the first portion, and tap the shrinkage dish as before until the paste is thoroughly compacted and all included air has been brought to the surface. Add more soil paste and continue the tapping until the shrinkage dish is completely filled and excess soil paste stands out about its edge. Then strike off the excess soil paste with a straight edge, and wipe off all soil adhering to the outside of the shrinkage dish.

**5.4** Weigh immediately the shrinkage dish as filled in 5.3 and record the weight as the weight of the shrinkage dish and wet soil pat. Allow the soil pat to dry in air until the colour of the pat turns from dark to light. Then oven-dry the pat in the shrinkage dish to constant weight at 105 to 110°C, cool in a desiccator and weigh immediately after removal from the desiccator. Record the weight as the weight of shrinkage dish and dry soil.

**5.5 Volume of the Dry Soil Pat** — Determine the volume of the dry soil pat by removing the pat from the shrinkage dish and immersing it in the glass cup full of mercury in the manner given in 5.5.1.

**5.5.1** Fill the glass cup to overflowing with mercury and remove the excess mercury by pressing the glass plate with the three prongs (see Fig. 1) firmly over the top of the cup, collecting the excess mercury in a suitable container. Carefully wipe off any mercury which may be adhering to the outside of the cup. Place the cup, filled thus with mercury, in the evaporating dish taking care not to spill any mercury from the glass cup, and place the oven-dried soil pat on the surface of the mercury in the cup. Then carefully force the pat under the mercury by means of the glass plate with the same prongs (see Fig. 1) and press the plate firmly over the top of the cup, the displaced mercury being collected in the evaporating dish without spilling out of it. Care shall be taken to ensure that no air is trapped under the soil pat. Weigh the mercury so displaced by the dry soil pat to an accuracy of 0.1 g and determine its volume by dividing this weight by the unit weight of mercury. Record this volume as the volume of the oven-dry soil pat,  $V_0$ .

## **6. PROCEDURE FOR DETERMINING SHRINKAGE LIMIT (UNDISTURBED SOIL)**

**6.1** Keep the specimen as prepared in 4.2 in a suitable small dish and

## IS: 2720 (Part VI)-1972

air-dry it. Then dry the specimen in the dish to constant weight in an oven at 105 to 110°C. Remove the specimen from the oven and smoothen the edges by sand papering. Brush off the soil dust from the specimen by a soft paint brush. Place the specimen again in the cleaned dish and dry it in an oven to constant weight. Cool the oven-dry specimen in a desiccator and weigh it with the dish. Determine the oven-dry weight of the specimen,  $W_{os}$ .

**6.2** Determine the volume  $V_{os}$  of the oven-dry specimen of **6.1** as described in **5.5.1**.

**6.3** Determine the specific gravity of the soil in accordance with IS: 2720 (Part III)-1964\*.

## 7. CALCULATIONS

**7.1 Moisture Content ( $w$ )** — Calculate the moisture content of wet soil pat (see **5**) as a percentage of the dry weight of the soil as follows:

$$w = \frac{W' - W_o}{W_o} \times 100$$

where

$w$  = moisture content of the pat (see **5**),

$W$  = weight of wet soil pat obtained by subtracting the weight of the shrinkage dish from the weight of the dish and wet pat, and

$W_o$  = weight of dry soil pat obtained by subtracting the weight of the shrinkage dish from the weight of the dish and dry pat.

**7.2 Shrinkage Limit (Remoulded Soil) ( $w_s$ )** — Calculate the shrinkage limit using the following formula:

$$w_s = w - \left( \frac{V - V_o}{W_o} \right) 100$$

where

$w_s$  = shrinkage limit in percent,

$w$  = moisture content of wet soil pat (see **7.1**) in percent,

$V$  = volume of wet soil pat in ml,

$V_o$  = volume of dry soil pat in ml, and

$W_o$  = weight of oven-dry soil pat in g.

**NOTE** — When the specific gravity of the soil is known the shrinkage limit may also

---

\*Methods of test for soils : Part III Determination of specific gravity.

be calculated by the following formula ( in this case, step indicated in 5.4 is not required ):

$$w_s = \left( \frac{1}{R} - \frac{1}{G} \right) 100$$

where

$w_s$  = shrinkage limit in percent,

$R$  = shrinkage ratio ( see 7.4 ), and

$G$  = specific gravity for the fraction used in the test determined in accordance with IS : 2720 ( Part III )-1964\*.

**7.3 Shrinkage Index (  $I_s$  )** — Calculate the shrinkage index using the following formula:

$$I_s = I_p - w_s$$

where

$I_p$  = plasticity index [ determined in accordance with IS: 2720 ( Part V )-1970† ].

**7.4 Shrinkage Ratio (  $R$  )** — Calculate the shrinkage ratio using the following formula:

$$R = \frac{W_o}{V_o}$$

where

$W_o$  = weight of oven-dry pat in g, and

$V_o$  = volume of oven-dry soil pat in ml.

**7.5 Volumetric Shrinkage ( Volumetric Change ) (  $V_s$  )** — Calculate the volumetric shrinkage using the following formula:

$$V_s = ( w_1 - w_s ) R$$

where

$w_1$  = given moisture content in percent,

$w_s$  = shrinkage limit ( see 7.2 ), and

$R$  = shrinkage ratio ( see 7.4 ).

**7.6 Shrinkage Limit ( Undisturbed Soil ) (  $w_{su}$  )** — Calculate the shrinkage limit ( undisturbed soil ) using the following formula ( of sample referred in 6 ):

$$w_{su} = \left( \frac{V_{os}}{W_{os}} - \frac{1}{G} \right) 100$$

where

$w_{su}$  = shrinkage limit ( undisturbed soil ) in percent,

\*Methods of test for soils: Part III Determination of specific gravity.

†Methods of test for soils: Part V Determination of liquid and plastic limits ( first revision ).

## IS : 2720 ( Part VI ) - 1972

$V_{os}$  = volume of oven-dry specimen in ml ( see 6.2 ),

$W_{os}$  = weight of oven-dry specimen in g ( see 6.1 ), and

$G$  = specific gravity of soil determined in accordance with  
IS : 2720 ( Part III )-1964\*.

### 8. REPORT

**8.1** The observations and results of the test shall be reported suitably. A recommended *pro forma* for the record of results is given in Appendix A.

**8.2** The tests shall be repeated at least three times for each soil sample and the average of the results thus obtained reported. If any individual value varies from the average by more than  $\pm 2$  percent, it shall be discarded and the test repeated.

## APPENDIX A

( Clause 8.1 )

### PRO FORMA FOR RECORD OF TEST RESULTS

a) *Shrinkage Limit ( Remoulded Soil )*

Project:

Laboratory number of sample:

Name of work:

Description of soil sample:

Soil fraction taken for the test:

Location	Bore/Trial Pit No.	Depth	Test No.
1. Determination No.			
2. Shrinkage dish No.			
3. Weight of shrinkage dish in g			
4. Weight of shrinkage dish + wet soil pat in g			
5. Weight of shrinkage dish + dry soil pat in g			
6. Weight of oven-dry soil pat ( $W_o$ ) in g			
7. Weight of water in g			
8. Moisture content ( $w$ ) of soil pat, percent			
9. Evaporating dish No. ( dish into which mercury filling shrinkage dish is transferred for weighing ) in g			
10. Weight of mercury filling shrinkage dish + weight of evaporating dish			
11. Weight of evaporating dish			

\*Methods of test for soils: Part III Determination of specific gravity.

12. Weight of mercury filling shrinkage dish in g			
13. Volume of wet soil pat (V) in ml			
14. Evaporating dish No.			
15. Weight of mercury displaced by the dry soil pat + weight of evaporating dish in g			
16. Weight of evaporating dish in g			
17. Weight of mercury displaced by the dry soil pat in g			
18. Volume of dry soil pat ( $V_o$ ) in ml			
19. $\left( \frac{V - V_o}{W_o} \right) 100$			
20. Shrinkage limit (remoulded soil)			
$w_s = \left( w - \frac{V - V_o}{W_o} \right) 100$			
21. Shrinkage ratio $R = \frac{W_o}{V_o}$			
22. Given moisture content w, percent			
23. ( $W_1 - w_s$ )			
24. Volumetric shrinkage $V_s = (W_1 - w_s) R$			

## b) Shrinkage Limit (Undisturbed Soil)

Project:

Laboratory number of sample:

Name of work:

Description of soil sample  
(including method of compaction  
used in the field, sampling  
method used, etc):

Location	Bore/Trial Pit No.	Depth	Test No.
1. Determination No.			
2. Dish No.			
3. Weight of dish + oven-dry soil specimen in g			
4. Weight of dish in g			
5. Weight of oven-dry soil specimen $W_{os}$ in g			
6. Evaporating dish No.			
7. Weight of mercury displaced by the oven-dry specimen + weight of evaporating dish in g			
8. Weight of evaporating dish in g			
9. Weight of mercury displaced by the oven-dry soil specimen in g			
10. Volume of the oven-dry soil specimen $V_{os}$ in ml			
11. $\frac{V_{os}}{W_{os}}$			
12. Specific gravity of the soil of the specimen G			
13. $1/G$			
14. Shrinkage limit (undisturbed soil)			
$w_{su} = \left( \frac{V_{os}}{W_{os}} - \frac{1}{G} \right) 100$			

## IS : 2720 (Part VI) - 1972

( Continued from page 2 )

### *Members*

SHRI S. K. GULHATI  
SHRI S. S. JOSHI  
SHRI O. P. MALHOTRA

DR I. S. UPPAL ( *Alternate* )  
SHRI R. S. MELKOTE  
DEPUTY DIRECTOR ( CENTRAL  
SOIL MECHANICS RESEARCH  
STATION ) ( *Alternate* )  
SHRI D. R. NARAHARI

SHRI G. S. JAIN ( *Alternate* )  
DR V. V. S. RAO  
SHRI K. K. GUPTA ( *Alternate* )  
REPRESENTATIVE

SHRI H. C. VERMA

SHRI M. N. BALIGA ( *Alternate* )

### *Representing*

Indian Institute of Technology, New Delhi  
Engineer-in-Chief's Branch, Army Headquarters  
Buildings & Roads Research Laboratory, Public  
Works Department, Government of Punjab

Central Water & Power Commission, New Delhi

Central Building Research Institute ( CSIR ),  
Roorkee

United Technical Consultants Pvt Ltd, New Delhi

Public Works Department, Government of Uttar  
Pradesh

Associated Instrument Manufacturers ( India ) Pvt  
Ltd, New Delhi



# BUREAU OF INDIAN STANDARDS

## Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanatha  
( Common to all offices )

## Regional Offices:

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg,  
NEW DELHI-110002

## Telephones

[331 01 31  
331 13 75  
36 24 99

\*Eastern : 1/14 C.I.T. Scheme VII M, V. I. P. Road,  
Maniktola, CALCUTTA 700054

Northern : SCO 445-446, Sector 35-C,  
CHANDIGARH 160036

[2 18 43  
3 16 41

Southern : C. I. T. Campus, MADRAS 600113

{41 24 42  
41 25 19  
41 29 16

†Western : Manakalaya, E9 MIDC, Marol, Andheri (East),  
BOMBAY 400093

6 32 92 95

## Branch Offices:

'Pushpak' Nurmohamed Shaikh Marg, Khanpur,  
AHMEDABAD 380001

[2 63 48  
2 63 49

‡Peenya Industrial Area, 1st Stage, Bangalore Tumkur Road  
BANGALORE 560058

[38 49 55  
38 49 56

Gangotri Complex, 5th Floor, Bhadbhada Road, T. T. Nagar,  
BHOPAL 462003

6 67 16

Plot No. 82/83, Lewis Road, BHUBANESHWAR 751002

5 36 27

53/5, Ward No. 29, R. G. Barua Road, 5th Byelane,  
GUWAHATI 781003

3 31 77

5-8-56C L. N. Gupta Marg ( Nampally Station Road ),  
HYDERABAD 500001

23 10 83

R14 Yudhister Marg, C Scheme, JAIPUR 302005

[6 34 71  
6 98 32

117/418 B Sarvodaya Nagar, KANPUR 208005

[21 68 76  
21 82 92

Patliputra Industrial Estate, PATNA 800013

6 23 05

T.C. No. 14/1421, University P.O., Palayam  
TRIVANDRUM 695035

[6 21 04  
6 21 17

## Inspection Office (With Sale Point) :

Pushpanjali, 1st Floor, 205-A West High Court Road,  
Shankar Nagar Square, NAGPUR 440010

2 51 71

Institution of Engineers ( India ) Building, 1332 Shivaji Nagar,  
PUNE 411005

5 24 35

\*Sales Office in Calcutta is at 5 Chowringhee Approach, P.O. Princep  
Street, Calcutta 700072

27 68 00

†Sales Office in Bombay is at Novelty Chambers, Grant Road,  
Bombay 400007

89 65 28

‡Sales Office in Bangalore is at Unity Building, Narasimharaja Square  
Bangalore 560002

22 36 71

**AMENDMENT NO. 1    DECEMBER 1982**  
**TO**  
**IS : 2720 (Part VI) -1972 METHODS OF TEST**  
**FOR SOILS**

**PART VI DETERMINATION OF SHRINKAGE FACTORS**

**( First Revision )**

**Alterations**

( Page 5, clauses 3.1 to 3.6 ) — Substitute the following for the existing clauses and re-number the subsequent clauses:

‘3.1 The evaporating dish, spatula, shrinkage dish, straight edge, glass cup, prong plate, plain plate and measuring cylinder shall conform to IS : 10077-1982\*.’

( Page 5, Fig. 1 ) — Delete.

( Page 8, clause 6.3; page 9, clause 7.2; and page 10, clause 7.6 ) — Substitute ‘ IS : 2720( Part III/Sec 2 )-1980\* ’ for ‘ IS : 2720( Part III )-1964\* ’ wherever appearing.

( Pages 8, 9 and 10, foot-note with ‘ \* ’ mark ) — Substitute the following for the existing foot-note:

‘\*Method of test for soils : Part III Determination of specific gravity, Section 2 Fine, medium and coarse grained soils ( first revision ).’

**Addenda**

( Page 5 ) — Add the following foot-note at the bottom:

‘†Specification for equipment for determination of shrinkage factors.’