

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 802-1-2 (1992): Code of Practice for Use of Structural Steel In Overhead Transmission Line Towers, Part 1: Material, Loads and Permissible Stress, Section 2: Permissible Stress [CED 7: Structural Engineering and structural sections]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक
शिरोपरि प्रेषण लाईन टावरों में संरचना इस्पात उपयोग
की रीति संहिता

भाग 1 सामग्री, भार और अनुमत प्रतिबल

खंड 2 अनुमत प्रतिबल

(तीसरा पुनरीक्षण)

Indian Standard

USE OF STRUCTURAL STEEL IN OVERHEAD
TRANSMISSION LINE TOWERS — CODE
OF PRACTICE

PART 1 MATERIAL, LOADS AND PERMISSIBLE STRESSES

Section 2 Permissible Stresses

(*Third Revision*)

First Reprint MAY 1995

UDC 621.315.668.2

© BIS 1992

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

FOREWORD

This Indian Standard (Third Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Structural Engineering Sectional Committee had been approved by the Civil Engineering Division Council.

This standard has been prepared with a view to establish uniform practices for design, fabrication, testing and inspection of overhead transmission line towers. Part 1 of the standard covers requirements in regard to material, types of towers, loading and permissible stresses apart from other relevant design provisions. Provisions for fabrication, galvanizing, inspection and packing have been covered in Part 2 whereas provisions for testing of these towers have been covered in Part 3 of the standard.

This standard (Part 1) was first published in 1967 and subsequently revised in 1973 and 1977. In this revision, the code has been split in two sections namely Section 1 Materials and loads, and Section 2 Permissible stresses. Other major modifications effected in this revision (Section 2) are as under:

- a) Permissible stresses in structural members have been given in terms of the yield strength of the material. With the inclusion of bolts of property class 5.6 of IS 12427 : 1988, permissible stresses for these bolts have also been included.
- b) Critical stress in compression F_{cr} has been modified for width/thickness ratio of the angles exceeding the limiting value for calculating the allowable unit compressive stresses.
- c) Effective slenderness ratios (KL/r) for redundant members have been included and provisions further elaborated.
- d) Examples for the determination of slenderness ratios have been extended to include 'K' and 'X' bracings with and without secondary members.

Designs provisions or other items not covered in this standard shall generally be in accordance with IS 800 : 1984 'Code of practice for general construction in steel (*second revision*)'.

While preparing this standard, practices prevailing in the country in this field have been kept in view. Assistance has also been derived from the 'Guide for design of steel transmission line towers' (second edition) — ASCE Manual No. 52, issued by American Society of Civil Engineers (ASCE) New York, 1988.

For the purpose of deciding whether a particular requirement of this Code is complied with, the final value, observed or calculated, expressing the result of a test, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

USE OF STRUCTURAL STEEL IN OVERHEAD TRANSMISSION LINE TOWERS — CODE OF PRACTICE

PART 1 MATERIAL, LOADS AND PERMISSIBLE STRESSES

Section 2 Permissible Stresses

(Third Revision)

1 SCOPE

1.1 This standard (Part 1/Sec 2) stipulates the permissible stresses and other design parameters to be adopted in the design of self-supporting steel lattice towers for overhead transmission lines.

1.1.1 Materials, type of towers, loading and broken wire conditions are covered in Section 1 of this standard.

1.1.2 Provisions on fabrication and testing of transmission line towers have been covered in Part 2 and Part 3 respectively of the standard.

NOTE — While formulating the provisions of this standard it has been assumed that the structural connections are through bolts.

1.2 This standard does not cover guyed towers. These will be covered in a separate standard.

2 REFERENCES

The Indian Standards listed in Annex A are necessary adjuncts to this standard.

3 STATUTORY REQUIREMENTS

3.1 Statutory requirement as laid down in the 'Indian Electricity Rules, 1956' or by any other statutory code applicable to such structures shall be followed.

3.2 Compliance with this code does not relieve any one from the responsibility of observing local and state byelaws, fire and safety laws and other civil aviation requirements applicable to such structures.

4 CONDUCTOR TENSION

4.1 The conductor tension at everyday temperature and without external load should not

exceed the following percentage of the ultimate strength of the conductor:

Initial unloaded tension	35 percent
Final unloaded tension	25 percent

provided that the ultimate tension under everyday temperature and full wind or minimum temperature and two-thirds wind pressure does not exceed 70 percent of the ultimate tensile strength of the cable.

5 PERMISSIBLE STRESSES

5.1 Axial Stresses in Tension

The estimated tensile stresses on the net effective sectional areas (*see* 9) in various members, shall not exceed minimum guaranteed yield stress of the material. However in case the angle section is connected by one leg only, the estimated tensile stress on the net effective sectional area shall not exceed F_y , where F_y is the minimum guaranteed yield stress of the material.

5.2 Axial Stresses in Compression

5.2.1 The estimated compressive stresses in various members shall not exceed the values given by the formulae in 5.2.2.

5.2.2 The allowable unit stress F_a , in MPa on the gross cross sectional area of the axially loaded compression members shall be:

$$\text{a) } F_a = \left[1 - \frac{1}{2} \left(\frac{KL/r}{C_c} \right)^2 \right] \times F_y \quad \text{when } KL/r \leq C_c$$

and,

$$\text{b) } F_a = \frac{\pi^2 \times E}{(KL/r)^2} \quad \text{when } KL/r > C_c$$

where

$$C_c = \pi \sqrt{2 E/F_y}$$

F_y = minimum guaranteed yield stress of the material, MPa

E = modulus of elasticity of steel that is 2×10^5 MPa,

KL/r = largest effective slenderness ratio of any unbraced segment of the member,

L = unbraced length of the compression member (see 6.1.1) in cm, and

r = appropriate radius of gyration in cm.

5.2.2.1 The formulae given in 5.2.2 are applicable provided the largest width thickness ratio b/t is not more than the limiting value given by:

$$(b/t)_{lim} = 210/\sqrt{F_y}$$

where

b = distance from edge of fillet to the extreme fibre in mm, and

t = thickness of flange in mm.

5.2.2.2 Where the width thickness ratio exceeds the limits given in 5.2.2.1, the formulae given in 5.2.2 shall be used substituting for F_y the value F_{cr} given by:

$$a) F_{cr} = \left[1.677 - \frac{0.677 (b/t)}{(b/t)_{lim}} \right] \times F_y$$

when $(b/t)_{lim} \leq b/t \leq 378/\sqrt{F_y}$

and,

$$b) F_{cr} = \frac{65\,550}{(b/t)} \quad \text{when } b/t > 378/\sqrt{F_y}$$

NOTE — The maximum permissible value of b/t for any type of steel shall not exceed 25.

5.3 The redundant members shall be checked individually for 2.5 percent of axial load carried by the member to which it supports.

5.4 Stresses in Bolts

Ultimate stresses in bolts conforming to property class 4.6 of IS 6639 : 1972 and to property class 5.6 of IS 12427 : 1988 shall not exceed the value given in Table 1. For bolts conforming to IS 3757 : 1985, permissible stresses and other provisions governing the use of high strength bolts reference shall be made to IS 4000 : 1992.

5.4.1 Where the material of bolt and the structural member are of different grades, the bearing strength of the joint shall be governed by the lower of the two.

Table 1 Ultimate Stresses in Bolts, MPa
(Clause 5.4)

Nature of Stress	Permissible Stress for Bolts of Property Class		Remarks
	4.6	5.6	
(1)	(2)	(3)	(4)
Shear			
Shear stress on gross area of bolts	218	310	For gross area of bolts (see 10.4). For bolts in double shear the area to be assumed shall be twice the area defined
Bearing			
Bearing stress on gross diameter of bolts	436	620	For the bolt area in bearing (see 10.5)
Tension			
Axial tensile stress	194	250	—

6 SLENDERNESS RATIOS

6.1 The slenderness ratios of compression and redundant members shall be determined as follows:

Type of Members	Value of KL/r
a) Compression Members	
i) Leg sections or joint members bolted in both faces at connections for $0 < L/r \leq 120$	L/r
ii) Members with concentric loading at both ends of the unsupported panel for $0 < L/r < 120$	L/r
iii) Member with concentric loading at one end and normal framing eccentricity at the other end of the unsupported panel for $0 < L/r < 120$	$30 + 0.75 L/r$
iv) Member with normal framing eccentricities at both ends of the unsupported panel for $0 < L/r < 120$	$60 + 0.50 L/r$
v) Member unrestrained against rotation at both ends of the unsupported panel for $120 < L/r \leq 200$	L/r

- vi) Member partially restrained against rotation at one end of the unsupported panel for $120 \leq L/r \leq 225$ $28.6 + 0.762 L/r$
- vii) Member partially restrained against rotation at both ends of the unsupported panel for $120 \leq L/r \leq 250$ $46.2 + 0.615 L/r$

b) Redundant Members

- i) For $0 < L/r < 250$ L/r

NOTE — The values of KL/r corresponding to (a) (vi) and (a) (vii), the following evaluation is suggested:

- 1 The restrained member must be connected to the restraining member with at least two bolts.
- 2 The restraining member must have a stiffness factor I/L in the stress plane (I = Moment of inertia and L = Length) that equals or exceeds the sum of the stiffness factors in the stress plane of the restrained members that are connected to it.
- 3 Angle members connected by one leg should have the holes located as close to the outstanding leg as feasible. Normal framing eccentricities at load transfer connection imply that connection holes are located between the heel of the angle end the centreline of the framing leg.

6.1.1 In calculating the slenderness ratio of the members, the length L should be the distance between the intersections of the centre of gravity lines at each end of the member.

6.2 Examples showing the application of the procedure given in 6.1 and 6.1.1 and method of determining the slenderness ratio of legs and bracings with or without secondary members are given in Annex B.

NOTE — Where test and/or analysis demonstrate that any other type of bracing pattern if found technically suitable, the same can be adopted.

6.3 The limiting values KL/r shall be as follows:

Leg members, ground wire peak member and lower members of the cross arms in compression	120
Other members carrying computed stresses	200
Redundant members and those carrying nominal stresses	250

6.4 Slenderness ratio L/r of a member carrying axial tension only, shall not exceed 400.

7 MINIMUM THICKNESS

7.1 Minimum thickness of galvanized and painted tower members shall be as follows:

	Minimum Thickness, mm	
	Galvanized	Painted
Leg members, ground wire peak member and lower members of cross arms in compression	5	6
Other members	4	5

7.2 Gusset plates shall be designed to resist the shear, direct and flexural stresses acting on the weakest or critical section. Re-entrant cuts shall be avoided as far as practical. Minimum thickness of gusset shall be 2 mm more than lattice it connects only in case when the lattice is directly connected on the gusset outside the leg member. In no case the gusset shall be less than 5 mm in thickness.

8 NET SECTIONAL AREA FOR TENSION MEMBER

8.1 The net sectional area shall be the least area which is to be obtained by deducting from the gross sectional area, the area of all holes cut by any straight, diagonal or zigzag line across the member. In determining the total area of the holes to be deducted from gross sectional area, the full area of the first hole shall be counted, plus a fraction part X , of each succeeding hole cut by the line of holes under consideration. The value of X shall be determined from the formula:

$$X = 1 - \frac{P^2}{4gd}$$

where

P = longitudinal spacing (stagger), that is the distance between two successive holes in the line of holes under consideration;

g = transverse spacing (gauge), that is the distance between the same two consecutive holes as for P ; and

d = diameter of holes.

For holes in opposite legs of angles, the value of g should be the sum of the gauges from the back of the angle less the thickness of the angle.

9 NET EFFECTIVE AREA FOR ANGLE SECTION IN TENSION

9.1 In the case of single angle connected through one leg, the net effective section of the angle shall be taken as:

$$A_1 + A_2 k$$

where

A_1 = effective sectional area of the connected leg,

A_2 = the gross cross-sectional area of the unconnected leg, and

$$k = \frac{3A_1}{A_1 + A_2}$$

where lug angles are used, the effective sectional area of the whole of the angle member shall be considered.

9.2 In the case of pair of angles back to back in tension connected by one leg of each angle to the same side of gusset, the net effective area shall be taken as:

$$A_1 + A_2 k$$

where

A_1 and A_2 are as defined in 9.1, and

$$k = \frac{5A_1}{5A_1 + A_2}$$

9.3 The angles connected together back-to-back (in contact) or separated back-to-back by a distance not exceeding the aggregate thickness of the connected parts shall be provided at pitch in line not exceeding 1 000 mm.

9.4 Where the angles are back to back but not connected as per 9.3, each angle shall be designed as a single angle connected through one leg only in accordance with 9.1.

9.5 When two tees are placed back to back but are not connected as per 9.3, each tee shall be designed as a single tee connected to one side of a gusset only in accordance with 9.2.

NOTE — The area of the leg of an angle shall be taken as the product of the thickness and the length from the outer corner minus half the thickness, and the area of the leg of a tee as the product of the thickness and the depth minus the thickness of the table.

10 BOLTING

10.1 Minimum Diameter of Bolts

The diameter of bolts shall not be less than 12 mm.

10.2 Preferred Sizes of Bolts

Bolts used for erection of transmission line towers shall be of diameter 12, 16 and 20 mm.

10.3 The length of bolts shall be such that the threaded portion does not lie in the plane of contact of members. The projected portion of the bolt beyond the nut shall be between 3 to 8 mm.

10.4 Gross Area of Bolt

For the purpose of calculating the shear stress, the gross area of bolts shall be taken as the nominal area of the bolt.

10.5 The bolt area for bearing shall be taken as $d \times t$ where d is the nominal diameter of the bolt, and t the thickness of the thinner of the parts jointed.

10.6 The net area of a bolt in tension shall be taken as the area at the root of the thread.

10.7 Holes for Bolting

The diameter of the hole drilled/punched shall not be more than the nominal diameter of the bolt plus 1.5 mm.

11 FRAMING

11.1 The angle between any two members common to a joint of a trussed frame shall preferably be greater than 20° and never less than 15° due to uncertainty of stress distribution between two closely spaced members.

ANNEX A

(Clause 2)

LIST OF REFERRED INDIAN STANDARDS

IS No.	Title	IS No.	Title
800 : 1984	Code of practice for use of structural steel in general building construction (revised)	4000 : 1992	Code of practice for high strength bolts in steel structures
3757 : 1985	High strength structural bolts (second revision)	6639 : 1972	Hexagonal bolt for steel structures
		12427 : 1988	Transmission tower bolts


ANNEX B

(Clause 6.2)

EXAMPLES OF DETERMINATION OF SLENDERNESS RATIOS

B-0 Example of determining the effective length of compression members of towers based on the provision given in 6.1 are given below.

B-1 LEG MEMBER USING SYMMETRICAL BRACING

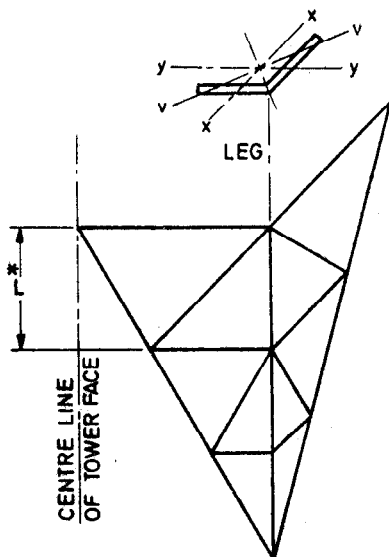

*Method of Loading/
Rigidity of Joints*


Slenderness Ratio

Concentric loading $\frac{L}{r_{vv}}$ from 0 to 120 $\left(\frac{KL}{r} = \frac{L}{r_{vv}} \right)$

No restraint at ends $\frac{L}{r_{vv}}$ from 120 to 200 $\left(\frac{KL}{r} = \frac{L}{r_{vv}} \right)$

* MEASURED LENGTH

B-2 LEG MEMBER USING STAGGERED BRACING

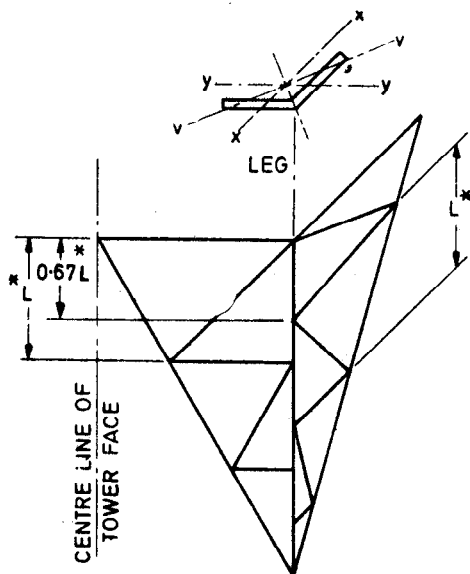


*Method of Loading/
Rigidity of Joints*

Slenderness Ratio

Concentric loading $\frac{L}{r_{xx}}$ or $\frac{L}{r_{yy}}$ or $0.67 \frac{L}{r_{vv}}$ from 0 to 120 $\left(\frac{KL}{r} = \frac{L}{r} \right)$

No restraint at ends $\frac{L}{r_{xx}}$ or $\frac{L}{r_{yy}}$ or $0.67 \frac{L}{r_{vv}}$ from 120 to 200 $\left(\frac{KL}{r} = \frac{L}{r} \right)$

* MEASURED LENGTH

B-3 EFFECT OF END CONNECTIONS ON MEMBER CAPACITY


*Method of Loading/Rigidity
of Joints*

Tension system with compression
strut (eccentricity in critical
axis)

Slenderness Ratio

$\frac{L}{r_{vv}}$ from 0 to 120

$$\left(\frac{KL}{r} = 60 + 0.5 \frac{L}{r} \right)$$




*Bracing Requirements (Single Angle
Members) :*

Single bolt connection, no res-
traint at ends

$\frac{L}{r_{vv}}$ from 120 to 200


$$\left(\frac{KL}{r} = \frac{L}{r} \right)$$



Multiple bolt connection partial
restraint at both ends

$\frac{L}{r_{vv}}$ from 120 to 250

$$\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$$

B-4 CONCENTRIC LOADING TWO ANGLE MEMBER


*Method of Loading/Rigidity
of Joints*

Tension system strut com-
pression concentric loading

Slenderness Ratio

$\frac{L}{r_{xx}}$ or $\frac{L}{r_{yy}}$ from 0 to 120

$$\left(\frac{KL}{r} = \frac{L}{r} \right)$$




*Bracing Requirements (Two
Angle Member) :*

Single bolt connection, no
restraint at ends

$\frac{L}{r_{xx}}$ or $\frac{L}{r_{yy}}$ from 120 to 200


$$\left(\frac{KL}{r} = \frac{L}{r} \right)$$



Multiple bolt connection,
partial restraint at ends

$\frac{L}{r_{xx}}$ or $\frac{L}{r_{yy}}$ from 120 to 250

$$\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$$

B-5 HORIZONTAL MEMBER OF K-BRACING-TWO ANGLE MEMBER

*Method of Loading/Rigidity
of Joints*


*Tension-compression system with
compression strut :*

Multiple bolt connection partial
restraint at ends and interme-
diate

Slenderness Ratio

$$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 120 to 250}$$

$$\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$$




*Bracing Requirements (Two Angle
Member):*

Concentric load at ends, eccentric
loading at intermediate in both
directions

$$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 0 to 120}$$

$$\left(\frac{KL}{r} = 30 + 0.75 \frac{L}{r} \right)$$




Concentric loading at ends and
intermediate

$$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 0 to 120}$$

$$\left(\frac{KL}{r} = \frac{L}{r} \right)$$

B-6 EFFECT OF SUBDIVIDED PANELS FOR THE HORIZONTAL MEMBER AND END CONNECTIONS ON MEMBER CAPACITY

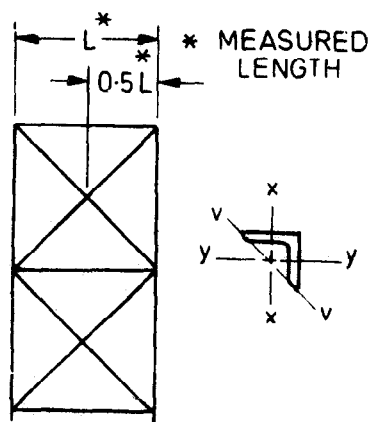

Method of Loading/Rigidity of Joints


Tension system with compression strut :

Eccentricity in critical axis

Slenderness Ratio

$$0.5 \frac{L}{r_{vv}} \text{ or } \frac{L}{r_{xx}} \text{ from 0 to 120}$$

$$\left(\frac{KL}{r} = 60 + 0.50 \frac{L}{r} \right)$$




Bracing Requirements :

Single bolt connection, no restraint at ends for intermediate

$$0.5 \frac{L}{r_{vv}} \text{ or } \frac{L}{r_{xx}} \text{ from 120 to 200}$$

$$\left(\frac{KL}{r} = \frac{L}{r} \right)$$

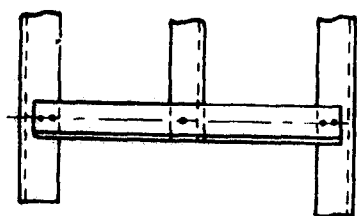

Multiple bolt connection at ends. Single bolt connection at intermediate point :

Partial restraint at one end, no restraint at intermediate


$$0.5 \frac{L}{r_{vv}} \text{ from 120 to 225 -}$$

$$\left(\frac{KL}{r} = 28.6 + 0.762 \frac{L}{r} \right)$$

Partial restraint at both ends

$$\frac{L}{r_{xx}} \text{ from 120 to 250}$$

$$\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$$




Multiple bolt connection

Partial restraint at ends and intermediate

$$0.5 \frac{L}{r_{vv}} \text{ or } \frac{L}{r_{xx}} \text{ from 120 to 250}$$

$$\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$$

B-7 CONCENTRIC LOADING TWO ANGLE MEMBER, SUBDIVIDED PANELS OF A HORIZONTAL MEMBER

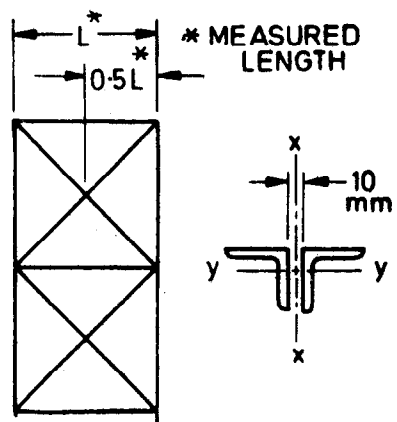


Method of Loading/Rigidity of Panel

Slenderness Ratio

Tension system with compression strut:

Concentric loading


$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 0 to 120}$
 $\left(\frac{KL}{r} = \frac{L}{r} \right)$

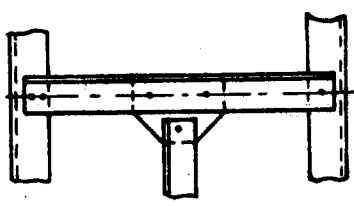

Bracing Requirements:

Single bolt connection, no restraint at ends and intermediate

$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 120 to 200}$
 $\left(\frac{KL}{r} = \frac{L}{r} \right)$

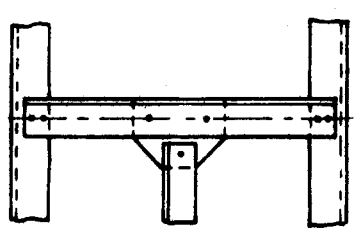


Multiple bolt connection at ends. Single bolt connection at intermediate joint

Partial restraint at one end, no restraint at intermediate

$0.5 \frac{L}{r_{yy}} \text{ from 120 to 200}$
 $\left(\frac{KL}{r} = 28.6 + 0.762 \frac{L}{r} \right)$

Partial restraint at both ends











$\frac{L}{r_{xx}} \text{ from 120 to 250}$
 $\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$

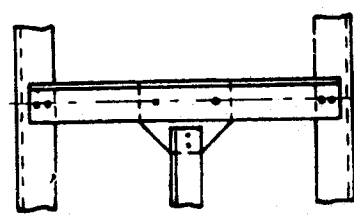

Multiple bolt connection
Partial restraint at ends and intermediate

$0.5 \frac{L}{r_{yy}} \text{ or } \frac{L}{r_{xx}} \text{ from 120 to 250}$
 $\left(\frac{KL}{r} = 46.2 + 0.615 \frac{L}{r} \right)$

B-8 X-BRACINGS WITH AND WITHOUT SECONDARY MEMBERS

B-8.1		<i>Slenderness Ratio Critical of :</i> AB/r_{yy}
B-8.2	<p>a) </p> <p>b) </p> <p>VIEW 1-1 </p>	AC/r_{yy} or CB/r_{yy} or $*AB/r_{xx}$ or $*AB/r_{yy}$ or $*AD/r_{yy}$ AC/r_{yy} or CB/r_{yy} or $*AD/r_{yy}$
B-8.3	<p>a) </p> <p>b) </p> <p>c) </p> <p>HIP BRACING </p> <p>VIEW 2-2</p>	AD/r_{yy} or $*AF/r_{xx}$ or DC/r_{yy} or $*AE/r_{yy}$ or CB/r_{yy} or $*AB/r_{xx}$ or $*AB/r_{yy}$ AD/r_{yy} or $*AF/r_{xx}$ or DC/r_{yy} or $*AE/r_{yy}$ or CB/r_{yy} or AC/r_{xx} or $*AC/r_{yy}$ AD/r_{yy} or $*AF/r_{xx}$ or DC/r_{yy} or CB/r_{yy} or $*AE/r_{yy}$
B-8.4	 <p>HIP BRACING </p> <p>VIEW 3-3</p>	AE/r_{yy} or $*AF/r_{xx}$ or ED/r_{yy} or $*AE/r_{yy}$ or DC/r_{yy} or CB/r_{yy}

*Application for tension compression system only i.e. tensile stresses in one bracing must be at least equal to 75 percent of the the compressive stress in the other bracing.

#The corner stay should be designed to provide lateral support adequately.

B-9 K-BRACINGS WITH AND WITHOUT SECONDARY MEMBERS

			<i>Slenderness Ratio Critical of :</i>	
B-9.1			AB/r_{vv}	
B-9.2			AC/r_{vv} or CB/r_{vv} or AB/r_{yy}	
a)			AC/r_{vv} or CB/r_{vv}	
b)			AC/r_{vv} or CB/r_{vv}	
B-9.3			AD/r_{vv} or DC/r_{vv} or CB/r_{vv} or AB/r_{xx} or AB/r_{yy}	
a)			AD/r_{vv} or DC/r_{vv} or CB/r_{vv} or AC/r_{xx} or AC/r_{yy}	
b)			AD/r_{vv} or DC/r_{vv} or CB/r_{vv} or AC/r_{xx} or AC/r_{yy}	
c)			AD/r_{vv} or DC/r_{vv} or CB/r_{vv}	
B-9.4			AE/r_{vv} or ED/r_{vv} or DC/r_{vv} or CB/r_{vv}	
			AE/r_{vv} or ED/r_{vv} or DC/r_{vv} or CB/r_{vv}	

#The corner stay should be designed to provide lateral support adequately.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'.

This Indian Standard has been developed from Doc : No. CED 7 (4725)

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
(Common to all offices)

Regional Offices :

Telephone

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	{ 331 01 31 331 13 75
Eastern : 1/14 C. I.T. Scheme VII M, V. I. P. Road, Maniktola CALCUTTA 700054	{ 37 84 99, 37 85 61 37 86 26, 37 86 62
Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160022	{ 60 38 43 60 20 25
Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113	{ 235 02 16, 235 04 42 235 15 19, 235 23 15
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) BOMBAY 400093	{ 632 92 95, 632 78 58 632 78 91, 632 78 92
Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. PATNA. THIRUVANANTHAPURAM.	

AMENDMENT NO. 1 JANUARY 1998
TO
IS 802 (Part 1/Sec 2) : 1992 USE OF
STRUCTURAL STEEL IN OVERHEAD TRANSMISSION
LINE TOWERS — CODE OF PRACTICE

PART 1 MATERIAL, LOADS AND
PERMISSIBLE STRESSES

Section 2 Permissible Stresses

(*Third Revision*)

(*Page 1, clause 3.1*) — Substitute the following for the existing:

‘3.1 Statutory requirement as laid down in the *Indian Electricity Rules*, 1956 or by any other statutory body applicable to such structures as covered in this standard shall be satisfied.’

[*Page 2, clause 5.2.2.2(b)*] — Correct the formula as:

$$F_{cr} = \frac{65\,550}{(b/t)^2} \text{ when } \frac{b}{E} > \frac{378}{\sqrt{F_y}}$$

[*Page 2, clause 6.1(a) (ii), (iii), (iv) and (v)*] — Substitute ‘ \leq ’ for ‘ $<$ ’ between ‘ L/r ’ and ‘120’.

(*Page 4, clause 9.1*) — Substitute

$$‘k = \frac{3A_1}{(3A_1 + A_2)} \text{ for } ‘k = \frac{3A_1}{A_1 + A_2}$$

(*Page 4, clause 9.3*) — Substitute the following for the existing:

‘9.3 The angles connected together back-to-back (in contact) or separated back-to-back by a distance not exceeding the aggregate thickness of the connected parts shall be provided with stich bolt at a pitch not exceeding 1 000 mm. The slenderness ratio of individual component between adjacent stich bolts shall not be more than that of the two members together.’

[*Page 10, clause B-8, Fig. 8.2(a) and 8.3(b)*] — Substitute the following figures for the existing.




Fig 8.2 (a)

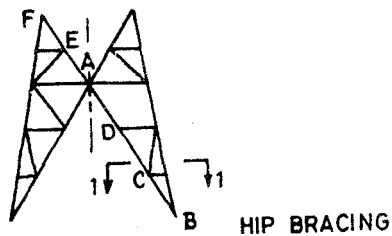


Fig. 8.3(b)

[Page 10, clause B-8.3(a), (b) and (c)] — Insert 'or EF/r_{vv} ' along with other values in the last column.